


## ZA 6 Condensate Drain

This drain is a low-priced externally mounted zero loss, light-duty float drain suitable for fitment to any inline air filter with a port size of  $\leq 3"$ . The aluminium bodied drain is fitted with a push button drain override. An inlet strainer and strainer blow-down valve is supplied as part of the drain scope.

Installation is via a top or side entry inlet port. The ZA6D is supplied with an inline pipe strainer and isolation valve and pipe fittings.

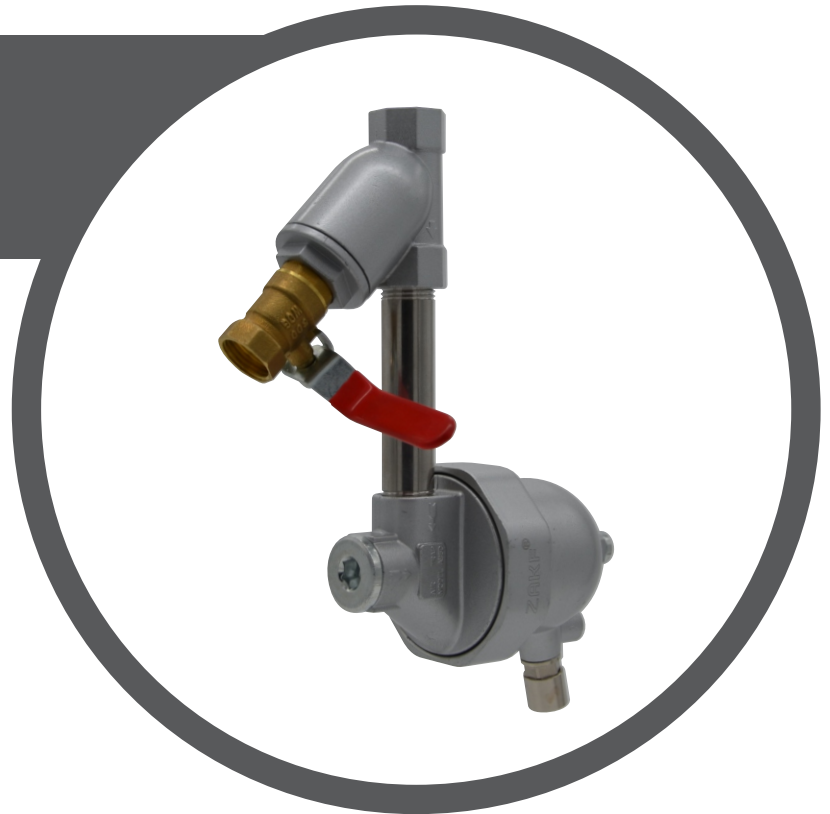

### APPLICATIONS:

- Small to mid-size filters and dryers

### TECHNICAL SPECIFICATION

PRESSURE RANGE	0 - 16 bar
MAXIMUM TEMPERATURE	1 - 100 °C
VALVE TYPE	Float Level Controlled
INLET CONNECTION	1/2" BSP
OUTLET CONNECTION	3/8" BSP
SIZE	L: 100 mm x W: 75 mm x H: 130 mm