

ARTIC DRIERS™

International (Pty) Ltd

Compressed Air Downstream Equipment and Accessories

Compressed Air Receivers



The air receivers imported and marketed by Artic Driers International conform to the European *Pressure Engineering Directives (PED)* and SANS 347 standards.

All our air receivers are plated to instantly comply with the local SANS 347 codes / requirements as well as the PED standards. The rated working pressure is 11 bar and are supplied with a local Authorised Inspection Authority conformance certification as well as the PED certificate.

These very cost effective vertical air receivers are painted RAL 5015 Blue. Receivers can be supplied with optional safety valves, pressure gauge and condensate drains at competitive prices.

Various sizes available from stock, other surface finishers are available.

Prices on 3000L, 4000L, 5000L, 6000L and 8000L available on request.

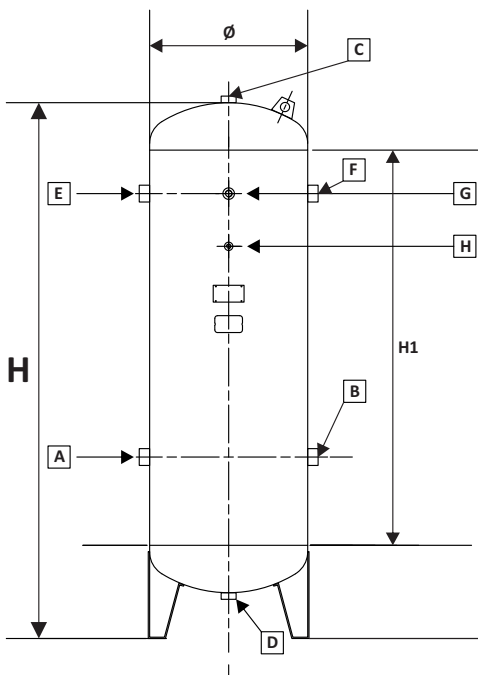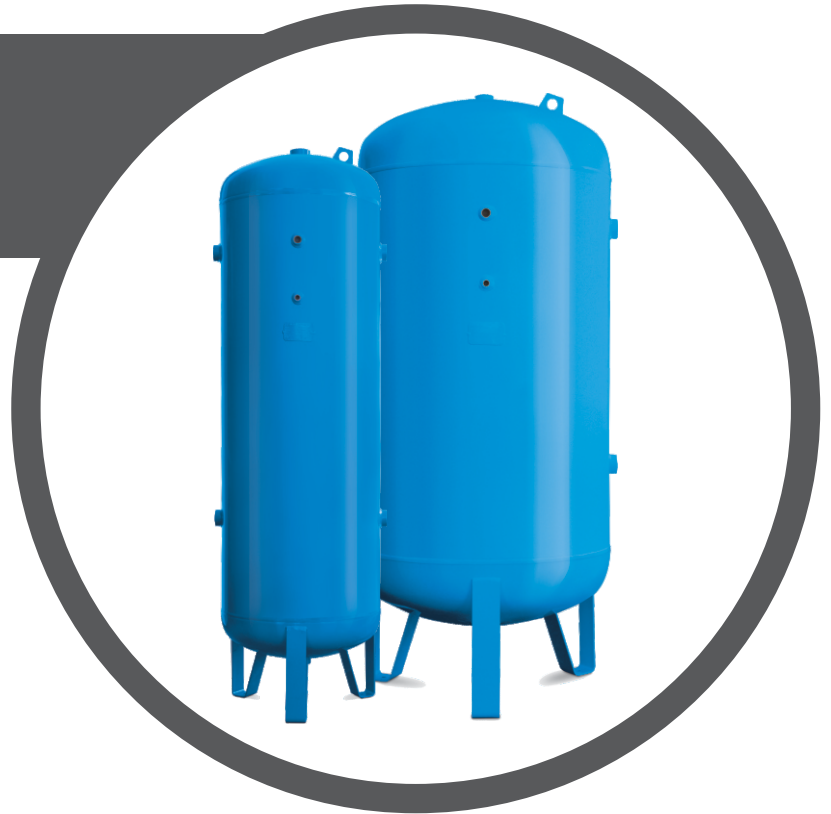

Dimensions and Connections

	270 L (mm)	500 L (mm)	1000 L (mm)	2000 L (mm)	3000 L (mm)
H	1685	2034	2310	2770	2929
H1	TBA	1500	1650	2000	2000
Ø	500	600	790	1000	1200
Weight (Kg)	60 Kg	130 Kg	210 Kg	352 Kg	537 Kg

	Description	Connection Size				
		270 L	500 L	1000 L	2000 L	3000 L
A	Inlet Option 1	¾"	1½"	2"	2"	3"
B	Inlet Option 2	¾"	1½"	2"	2"	3"
C	Safety Valve Option	2"	1¼"	1¼"	1¼"	1¼"
D	Drain	2"	1¼"	1¼"	1¼"	1¼"
E	Outlet Option 1	¾"	1½"	2"	2"	3"
F	Outlet Option 2	¾"	1½"	2"	2"	3"
G	Pressure Gauge	¾"	¾"	¾"	¾"	¾"
H	Safety Valve Option	¾"	¾"	¾"	¾"	¾"